




**Part number: SIP000125 - Model: SIPA8-N1.5**

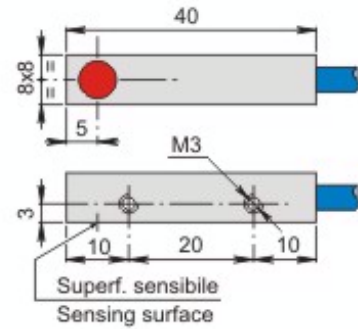

Dimension in mm


### TECHNICAL CHARACTERISTICS

Power supply:	Direct current
Working voltage:	5 ÷ 30 Vdc
Switching distance (mm):	1.5
Max switching frequency:	2000 Hz
Repeatability (%Sn):	< = 3
Absorption:	On < = 1 mA - Off > = 3 mA @ 8.2V
Temperature limits:	-25 ÷ +70 °C
IP rating:	IP 67
Housing material:	Anodized anticorodal
Mechanical characteristics:	SIPA 8x8x40
Connection type:	Cable 3 m
Cable type:	2x0.25 PVC
Weigth:	50 g




Part number: SIP000125 - Model: SIPA8-N1.5

**WIRING DIAGRAM**

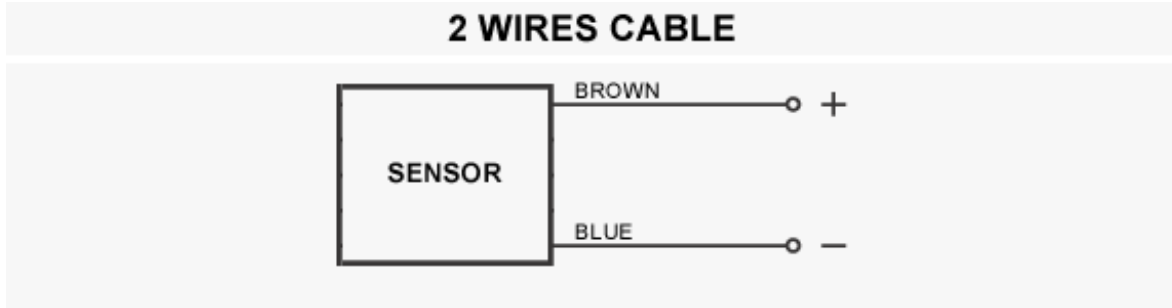


**INSTRUCTIONS FOR CORRECT INSTALLATION**

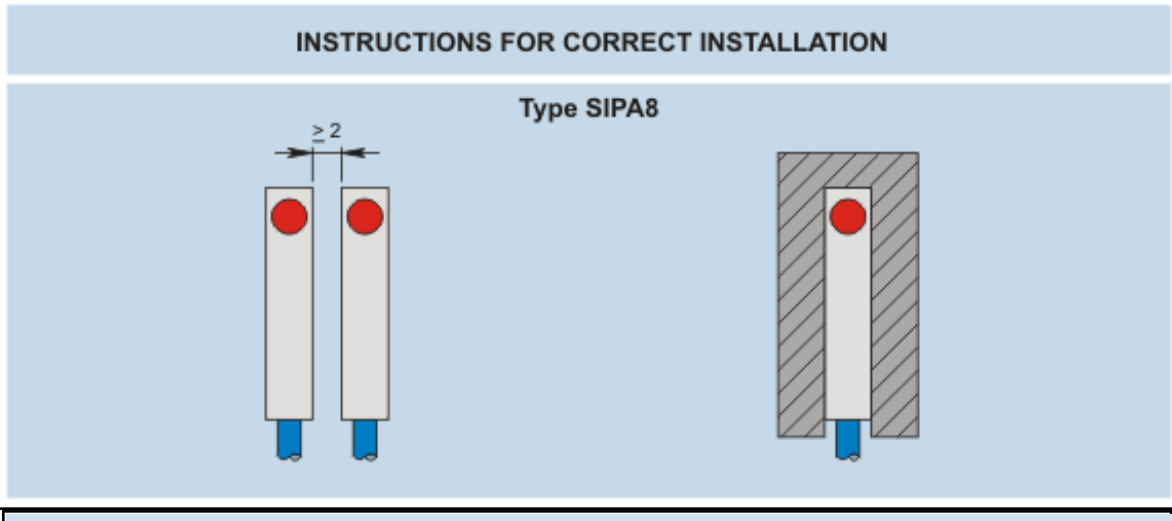


## WORKING PRINCIPLE



In presence of metal  $I \leq 1 \text{ mA @ } 8.2 \text{ V}$

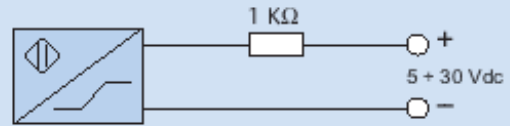

In absence of metal  $I \geq 3 \text{ mA @ } 8.2 \text{ V}$

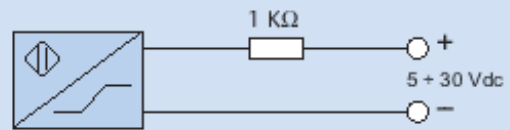

The NAMUR sensors are electronic devices whose absorbed current varies in the presence of a metallic object. The difference between these sensors and traditional sensors is the absence of amplifier trigger stages.