



**Part number: SIP000130 - Model: SIPC8-N1.5 H1**





<b>TECHNICAL CHARACTERISTICS</b>	
Power supply:	Direct current
Working voltage:	5 ÷ 30 Vdc
Switching distance (mm):	1.5
Max switching frequency:	2000 Hz
Repeatability (%Sn):	< = 3
Absorption:	On < = 1 mA - Off >= 3 mA @ 8.2V
Temperature limits:	-25 ÷ +70 °C
IP rating:	Depending on connector
Housing material:	Anodized anticorodal
Mechanical characteristics:	SIPC 8x8x40
Connection type:	H1 plug
Weigth:	20 g



Part number: SIP000130 - Model: SIPC8-N1.5 H1

## WIRING DIAGRAM

### CONNECTION WITH H1 PLUG





VIEW OF MALE CONNECTOR

1 = Brown / +  
3 = Blue / -

## INSTRUCTIONS FOR CORRECT INSTALLATION

### INSTRUCTIONS FOR CORRECT INSTALLATION

Type SIPC8

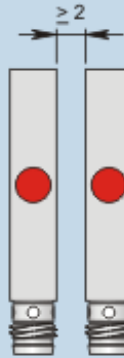


## WORKING PRINCIPLE




Metallic plate



In presence of metal  $I \leq 1 \text{ mA @ } 8.2 \text{ V}$

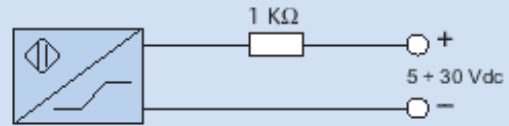

In absence of metal  $I \geq 3 \text{ mA @ } 8.2 \text{ V}$

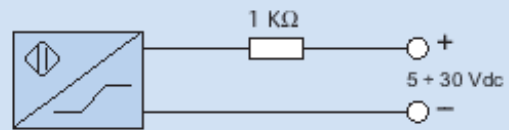

The NAMUR sensors are electronic devices whose absorbed current varies in the presence of a metallic object. The difference between these sensors and traditional sensors is the absence of amplifier trigger stages.